



## ZP787-2

Addressable waterproof callpoint

### IP67 rating

The ZP787-2 is a waterproof, surface mounting, call point providing a manual means of initiating a fire alarm. Rated at IP67, the unit is designed for outdoor applications or in systems where the ingress of water can be expected, for example where hygiene requirements demand regular washing or hosing down of the protected area.

Complying with EN 54 Part 11, the ZP787-2 is suitable for installations meeting the recommendations of most local codes (e.g. BS 5839 Part 1). The callpoint is approved by several international approval bodies.

Intended to provide a rugged, reliable means of initiating a fire alarm, the call point can be particularly useful where a manual means of activation, has to be provided outdoors. The enclosure is constructed of red high impact plastic, clearly labeled fire.



### Coated glass element

The unit is operated by breaking a frangible glass element with finger pressure. Glass elements have clear vinyl coatings on the front surface to prevent operator injury and to inhibit the release of loose fragments, as the glass is broken. Installed as part of the ZP3 analogue addressable system, up to 127 devices (call points, sensors and interface units) can be connected to each of the control panel loops. All loop devices incorporate switch settings enabling them to be assigned a unique address, which is polled by the panel every two seconds.

### Special test key

System testing is carried out by using a special test key which is inserted into a slot in the base of the call point moulding, the glass element drops allowing the device to operate.

For locations where accidental or malicious use may occur, the operation of the unit can be restricted by the addition of a hinged, clear polycarbonate, front cover (Z-CPC). For further protection the cover can be secured by a breakable seal (Z-CCS-1). In use the seal must be broken, prior to raising the cover.

### Standard Features


- IP 67 rating
- Addressable
- Complies with BS 5839 Part 2 and EN 54 Part 11
- System test facility via test key
- Operated by finger pressure

# ZP787-2

Addressable waterproof callpoint

## Specifications

Model No	ZP787-2
Specification	EN54 Pt11
Description	Addressable callpoint - waterproof
Compatibility	All ZP analogue addressable systems
Mounting	Surface
Wiring	ZP loop - 2 cores plus screen - screen continuity must be maintained
Monitoring	Open and short circuit loop wiring faults
Operating principle	Micro switch
Indication	Red indicator (LED) in alarm
Operating voltage	16 to 22 Vdc
Current	600uA quiescent, 700uA alarm
Application	Indoor or outside installation
EN60529 rating	IP67
Temperature range	-10°C to +75°C
EMC	CE marked (EEC89/336)
Material	Moulded ABS
Dimensions	130mm (H) x 124mm (W) x 60mm (D)
Colour	Red
Weight	400g
Publication No	PS1250

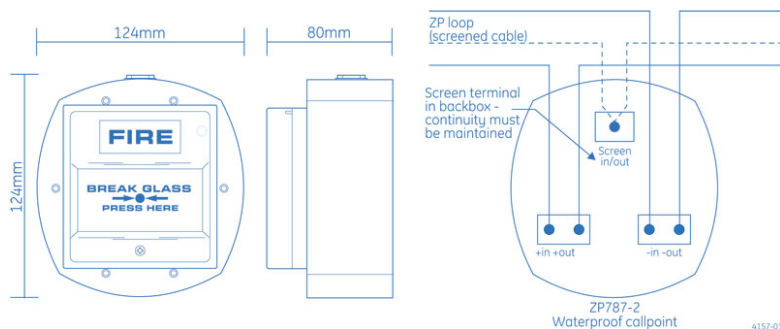

## Ordering Information

Part No.	Description
ZP787-2	Addressable waterproof callpoint

As a company of innovation, GE Security reserves the right to change product specifications without notice. For the latest product specifications, visit GE Security online or contact your GE Security sales representative.

IPS-ZP787-2-2007-07-31 11:05:15 Released : 12.07.2007

UK Sales: 8 Newmarket Court, Chippenham Drive, Kingston, Milton Keynes, MK10 0AQ, United Kingdom, Telephone +44 (0) 1908 281981, Fax +44 (0) 1908 282554  
South Africa: Zitton House, 555 Voortrekker Road, Maitland, 7405, P.O. Box 181, Maitland, 7404, South Africa, Telephone +27 (0)21 506 6000, Fax +27 (0)21 506 6050